


BASS MANAGEMENT INDOOR SUBWOOFERS



KELONIK CINEMA SOUND

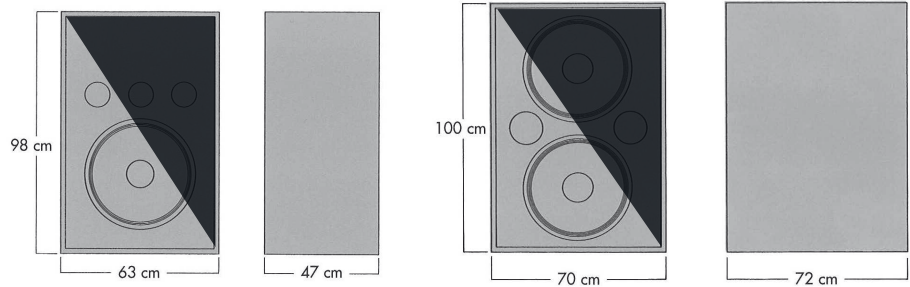

C-118-AR
C-118-HR

C-218-AR
C-218-HR

TECHNICAL DATA

	C-118-AR	C-118-HR	C-218-AR	C-218-HR
Frequency Range (-10 dB)	20 Hz- 500 Hz	30 Hz- 500 Hz	20 Hz- 500 Hz	30 Hz- 500 Hz
Nominal Impedance	8 Ω	8 Ω	4 Ω	4 Ω
POWER CAPACITY				
Continuous Pink Noise ⁽¹⁾	1000 W	700 W	2000 W	1400 W
Continuous Program	2000 W	1400 W	4000 W	2800 W
Sensitivity 1W/1m	99 dB S.P.L.	98 dB S.P.L.	102 dB S.P.L.	101 dB S.P.L.
Crossover Frequency	80-100 Hz recomended	80-100 Hz recomended	80-110 Hz recomended	80-110 Hz recomended
Dimensions (H x W x D)	98 x 63 x 47 cm	98 x 63 x 47 cm	100 x 70 x 72 cm	100 x 70 x 72 cm
Net Weight	49 kg	48,15 kg	74,80 kg	74,50 kg

(1) Based on a 2 hour test using a continuous 6 dB crest factor pink noise signal band limited according to IEC 268-1 (1985).