

S-7600

Item Code

47038-A



SCREEN CHANNEL

S-7600

SUMINISTROS KELONIK SA
C/ Badajoz, 159 bis - 08018 Barcelona - Spain
Tel. +34 93 300 43 61
Updated (DD/MM/YYYY): 21/05/2026



Key Features

- Compact Design: 47 cm depth, ideal for installations with space limitations behind the projection screen.
- Passive Crossovers: 380 Hz cutoff between low and mid ranges, and 1.8 kHz cutoff between mid and high ranges for clear frequency separation.
- Bass Performance: Direct radiation bass cabinet with dual 15" speakers for deep, impactful low-end sound.
- Improved Voice Spectrum: 6.5" cone speaker and a 90° x 40° constant dispersion horn enhance dialogue intelligibility compared to two-way systems.
- High-Frequency Driver: Compression driver with a titanium diaphragm and a constant directivity horn for clear, precise high-frequency output.

Description

The K.C.S. S-7600 three-way speaker system is designed specifically for screen channels in small-sized auditoriums.

Its compact 47 cm depth makes it an ideal solution for spaces with limited room behind the projection screen.

The system includes passive crossovers with a frequency cut at 380 Hz between the low and mid ranges, and a 1.8 kHz cut between the mid and high ranges.

The bass section features direct radiation technology, equipped with dual 15" speakers.

The voice spectrum is handled by a 6.5" cone speaker and a 90° x 40° constant dispersion horn, enhancing dialogue intelligibility compared to conventional two-way systems.

For the high-frequency range, it includes a titanium diaphragm compression driver with a constant directivity horn, ensuring clear and precise sound reproduction.

S-7600

Specifications

PASSIVE SPEAKER

Performances

Frequency Range (-10 dB)	30Hz-20kHz
--------------------------	------------

LF Nominal Impedance	4 Ohms
----------------------	--------

LF AES Power (1)	1000 W
------------------	--------

LF Continuous Program	2000 W
-----------------------	--------

MF Nominal Impedance	-
----------------------	---

MF AES Power (1)	-
------------------	---

MF Continuous Program	-
-----------------------	---

HF Nominal Impedance	-
----------------------	---

HF AES Power (1)	-
------------------	---

HF Continuous Program	-
-----------------------	---

System Sensitivity 1 W/1 m (2)	98 dB
--------------------------------	-------

LF Sensitivity 1 W/1 m (2)	-
----------------------------	---

MF Sensitivity 1 W/1 m (2)	-
----------------------------	---

HF Sensitivity 1 W/1 m (2)	-
----------------------------	---

MF / HF Bracket	Adjustable Bracket
-----------------	--------------------

Beam Horizontal Angle	90 degrees
-----------------------	------------

Beam Vertical Angle	40 degrees
---------------------	------------

(1) - Based on a 2 hours test using a continuous 6 dB crest factor pink noise signal band limited according to IEC 268-1 (1985).

(2) - Free field sensitivity (Half Space sensitivity +3 dB)

(3) - Rating based on test signal of filtered random noise conforming to the International Standard IEC 268-1 (pink noise with 12 dB per octave roll-off below 40 Hz and above 5000 Hz with a peak-to average ratio of 6 dB).

S-7600


SUMINISTROS KELONIK SA
C/ Badajoz, 159 bis - 08018 Barcelona - Spain
Tel. +34 93 300 43 61
Updated (DD/MM/YYYY): 21/05/2026



Enclosure

Dimensions cm (H x W x D) 155 x 63 x 47

Net Weight 59,6 Kg

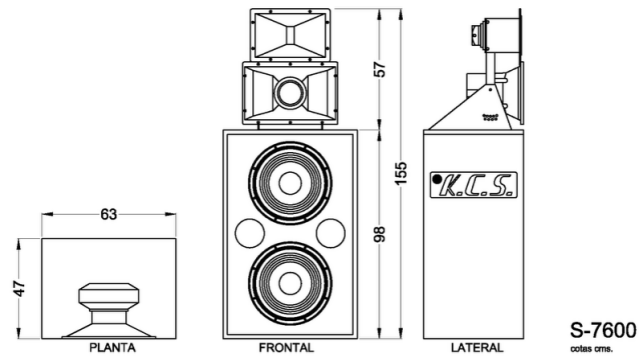

Components

	Quantity	Reference	Item Code
Enclosure Reference	1	C-215-FV/F-7600	47169-A
	-	-	-
LF Reference	2	S-15-FV	47403-A
MF Reference	1	S-6	47313-A
HF Reference	1	S-701	47204-A
MF / HF Assembly Kit	1	M/H-7600	47129-A
MF / HF Bracket	1	SP-7600	47347-A
MF Horn	1	BM-941	47324-A
HF Horn	1	BC-94	47239-A

S-7600

Connectors

Audio Input Connectors

Push Type Terminal

Spare Parts

	Reference	Item Code
LF Recone Kit	GM-S-15-FV	TBC
MF Recone Kit	-	-
HF Recone Kit	GM-S-401	47229-A
Passive Filter	F-7600	47385-A
MF / HF Filter	-	-

EQ Settings

Check the dedicated EQ Setting page on our website
https://kcsspeakers.com/en/EQ_Setting.html

S-7600