


DIGITAL ANALOG CONVERTERS

KCS DAC-I16O16

AES3



Front panel of KCS DAC-I16O16

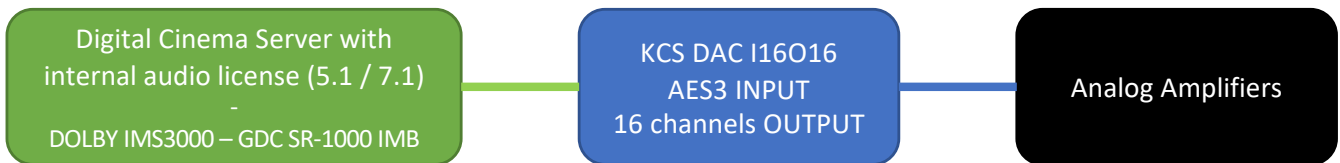

KCS DAC RANGE	KCS DAC-I8O8	KCS DAC-I12O12	KCS DAC-I16O16
TECHNICAL SPECIFICATIONS			
Digital Input	8	12	16
AES Input	AES 3	AES 3	AES 3
Digital Input connector	(1) RJ-45	(2) RJ-45	(2) RJ-45
Suitable for 5.1 / 7.1	YES	YES	YES
Suitable for immersive (above 16 channels DCP - Atmos or DTS:X)	-	-	-
Analog Output	8	12	16
Analog Output connector	(1) DB-25	(2) DB-25	(2) DB-25
TECHNICAL INDEX			
Dynamic Range(24bit)		114 dB	
Highest Sampling Rate		192 kHz	
Signal to Noise Ratio		114 dB	
Isolation Between Channels		111 dB	
Total Harmonic Distortion (THD+N)		- 60 dB	