

DIGITAL ANALOG CONVERTERS

KCS DAC-I32O32


AES67



Front panel of KCS DAC-I32O32



Rear panel of KCS DAC-I32O32

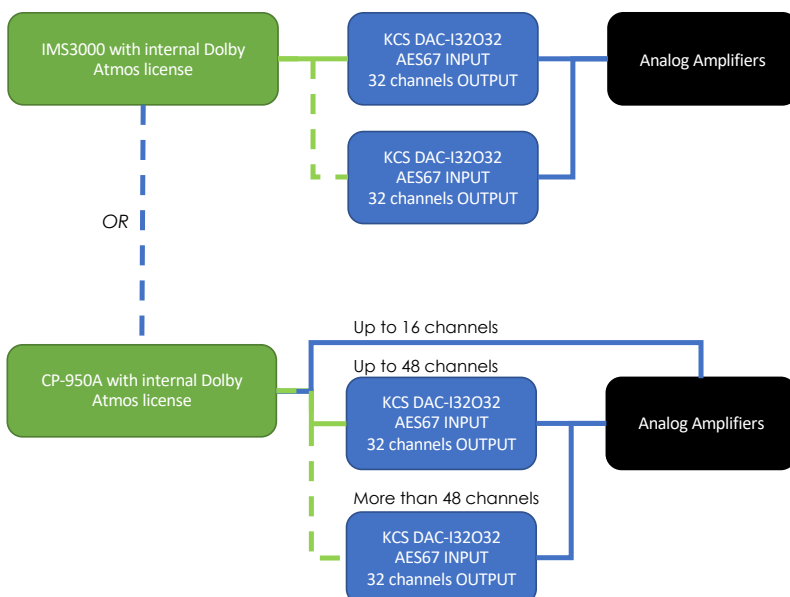

KCS DAC RANGE

KCS DAC-I32O32

| TECHNICAL SPECIFICATIONS | |
|---|-----------|
| Digital Input | 32 |
| AES Input | AES 67 |
| Digital Input connector | (2) RJ-45 |
| Suitable for 5.1 / 7.1 | YES |
| Suitable for immersive (above 16 channels DCP - Atmos or DTS:X) | YES |
| Analog Output | 32 |
| Analog Output connector | (4) DB-25 |
| TECHNICAL INDEX | |
| Dynamic Range(24bit) | 114 dB |
| Highest Sampling Rate | 192 kHz |
| Signal to Noise Ratio | 114 dB |
| Isolation Between Channels | 111 dB |
| Total Harmonic Distortion (THD+N) | - 60 dB |